


J38220 ULTRA GREEN Semi Gloss 230

DRAFT | Microporous Coated Paper

Printability

- simplex printable

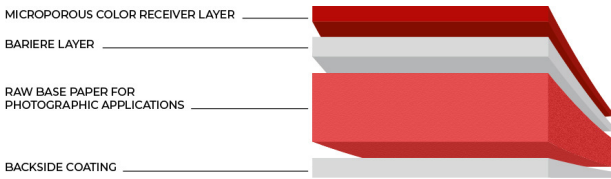

Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m ²	231	± 7
Thickness	DIN EN ISO 534	µm	230	± 6
	DIN EN ISO 536	mil	9,1	± 0,3
Gloss BYK	ISO 2813	60°	48	± 5
Colour Elrepho UVO (D65)	ISO 2469	L	96,4	± 0,6
		a	-0,1	± 0.4
		b	1,5	± 0.7
		delta b	9,4	± 0,7
CIE Whiteness (D65/10°) min.	ISO 2469		> 125	
Opacity min.	ISO 2469	%	> 94	

Printing Technology

- Inkjet water-based

Key Applications

- Poster / Wall Decoration
- Photo prints
- Photos
- Photo Retail
- Sign & Display Graphics

Version: 02/2024

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



J38220 ULTRA GREEN Semi Gloss 230

DRAFT | Microporous Coated Paper

Benefits & Properties

- Photorealistic print results
- Maximum scratch resistance
- Pin-sharp details
- High opacity
- High colour consistency and gamut
- Vivid colours
- Instant dry

Version: 02/2024

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



FELIX SCHOELLER